

# **Concrete Masonry Units**

## **Shapes and Dimensions**

### **Woodruff Block Company**

495 West Parishville Rd.  
Potsdam NY 13676

Phone: 315-265-6200 or 800-721-BLOK

Fax: 315-265-1160

Email: [wbc@northnet.org](mailto:wbc@northnet.org)

Web: [www.woodruffblock.com](http://www.woodruffblock.com)



**Manufactured locally at  
Woodruff Block Company**

# Table of Contents

Plain End	3-4
Stretchers	4-5
Universals	5-6
Solids	6-7
Knock-Out Bond Beams	7-9
Solid Bottom Bond Beams	9
Half Blocks	10
Custom Shapes	11
L-Corners	12
L-Corner Installation Sample	13
2 Hour Fire Rated	14
More Info....	15

## MORE INFO.....


- Vertical Bull nose available in Single or Double on most units
- Water repellency units available on all units, when requested
- Insulated units available upon request
- 18" long units available on majority of units

Please call for more information on above items.

Photo currently not available

**6" 2 Hour Fire Rated**  
• Three Core


**SPECIAL ORDER**



**8" 2 Hour Fire Rated**

Percent Solid: 53.24 %  
Equivalent Thickness: 4.06 Inches


40 Lbs. Per unit  
90 per pallet

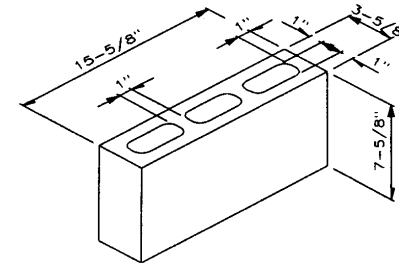

**4" Regular (Plain End)**

Percent Solid: 72.31 %  
Equivalent Thickness: 2.62 inches


25.5 lbs. Per unit  
150 per pallet

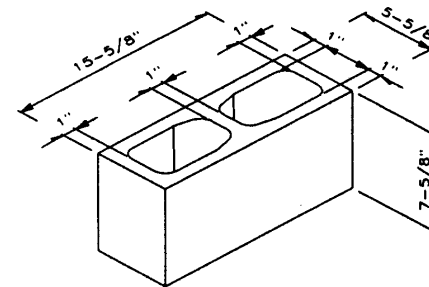

**6" Regular (Plain End)**

Percent Solid: 54.01 %  
Equivalent Thickness: 3.04 inches


29.5 lbs. Per unit  
120 per pallet

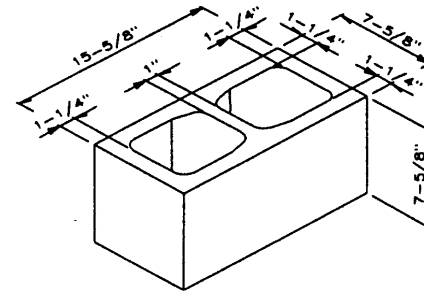

**8" Pilaster (Plain End)**


Percent Solid: 53.12 %  
Equivalent Thickness: 4.05 inches

43 lbs. Per unit  
30 per pallet




**16 X 16 Pilaster (Plain End)**

57 lbs. Per unit  
45 per pallet




### 17 X 17 Chimney (Plain End)

104 Lbs. Per unit  
30 per pallet

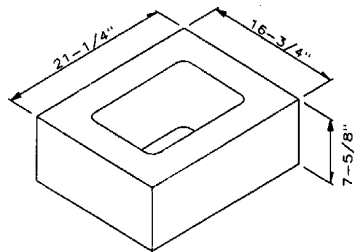

### 17 X 21 Chimney (Plain End)


105 Lbs. Per unit  
30 per pallet

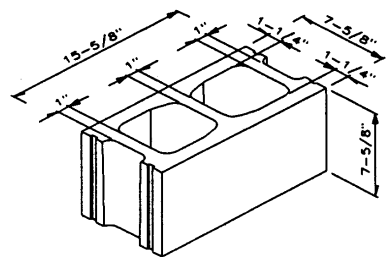

### 8" Regular (Stretcher)

Percent Solid: 53.24 %  
Equivalent Thickness: 4.06 Inches


40 Lbs. Per unit  
90 per pallet

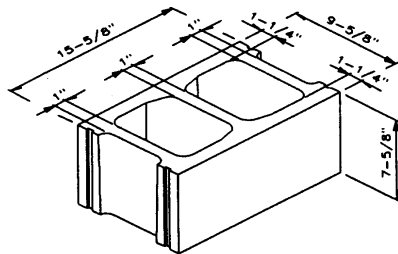

### 10" Regular (Stretcher)


Percent Solid: 50.4 %  
Equivalent Thickness: 4.86 Inches

45.5 Lbs. Per unit  
80 per pallet




### L-Corner Illustration

- Turning Corner w/ 12" L-Corner




### L-Corner Illustration

- Turning Corner w/ Brick & 8" Universal



### L-Corner Illustration


- Turning Corner w/ 4" Block

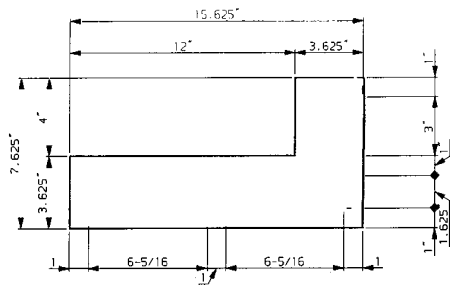

**4" L-Corner (Solid)**  
 • Return Corner

**SPECIAL ORDER**


34 Lbs. Per unit  
 100 per pallet

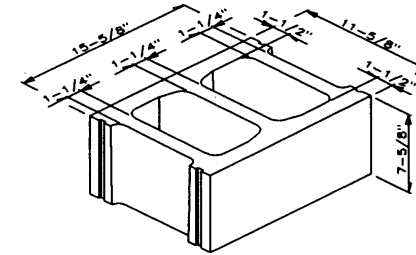

**12" Regular (Stretcher)**

Percent Solid: 49.10 %  
 Equivalent Thickness: 5.71 inches


53.75 Lbs. Per unit  
 65 per pallet



**6" L-Corner (Cored)**  
 • Return Corner

**SPECIAL ORDER**


51 Lbs. Per unit  
 69 per pallet



**6" Universal with Breaker & Sash**  
 • Jamb / Corner


Percent Solid: 54.61 %  
 Equivalent Thickness: 3.08 inches

34 Lbs. Per unit  
 120 per pallet

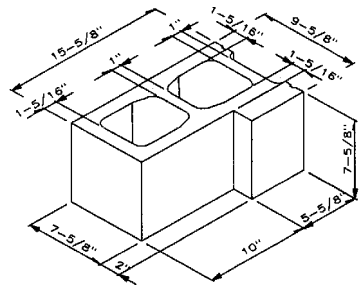

**10" L-Corner (Cored)**  
 • Return Corner


51 Lbs. Per unit  
 69 per pallet



**8" Universal with Breaker & Sash**  
 • Jamb / Corner


Percent Solid: 54.42 %  
 Equivalent Thickness: 4.15 inches

45.25 Lbs. Per unit  
 90 per pallet

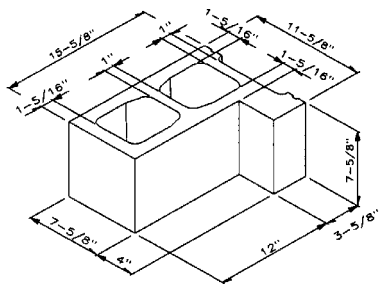

**12" L-Corner (Cored)**  
 • Return Corner


**SPECIAL ORDER**



**10" Universal with Breaker & Sash**  
 • Jamb / Corner

Percent Solid: 51.99 %  
 Equivalent Thickness: 5.02 inches


53.25 Lbs. Per unit  
 80 per pallet

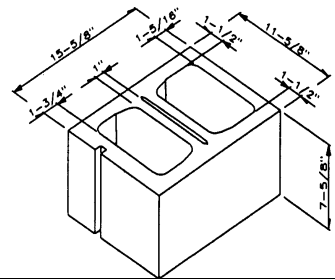

**12" Universal with Breaker & Sash**  
 • Jamb / Corner

61 Lbs. Per unit  
 65 per pallet

**Concrete Brick (Solid)**

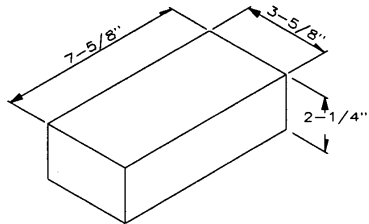


Percent Solid: 100 %

4.5 Lbs. Per unit  
 700 per pallet

**2" Solid**

- Soap / Slab / Termite

Percent Solid: 100 %




16 Lbs. Per unit  
 240 per pallet

**3" Solid**

- Soap / Slab / Termite

Percent Solid: 100 %




24 Lbs. Per unit  
 180 per pallet

Photo currently  
 not available


- 4 x 8 x 15 Custom
- 45 Degrees

**SPECIAL ORDER**




- 8 X 8 X 16 Custom
- 22.5 Degrees

**SPECIAL ORDER**



- 8 x 8 x 14 Custom
- Squint Block 135 Degrees


31 Lbs. Per unit  
 108 per pallet



- 4 x 8 x 17 Custom
- 24" Diameter Column


**SPECIAL ORDER**

33 Lbs. Per unit  
 130 per pallet

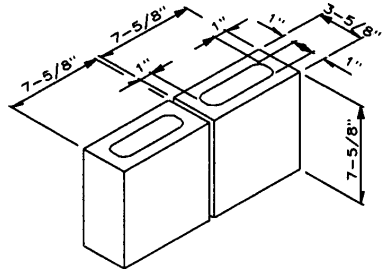


**4" Half Block**

12 Lbs. Per unit  
300 per pallet

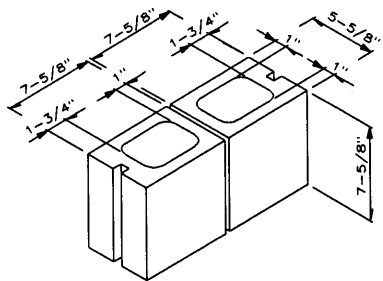


**6" Half Block**

16 Lbs. Per unit  
240 per pallet

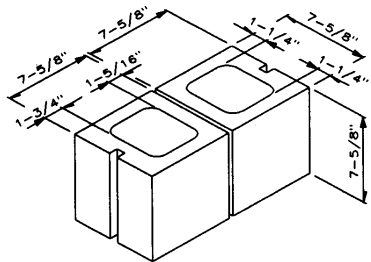


**8" Half Block**

18 Lbs. Per unit  
150 per pallet

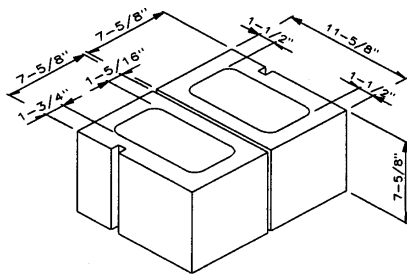

**12" Half Block**


32 Lbs. Per unit  
120 per pallet



**4" Solid**  
• Soap / Slab / Termite

Percent Solid: 100 %


35.5 Lbs. Per unit  
120 per pallet



**6" Solid**  
• Soap / Slab / Termite

Percent Solid: 100 %


51 Lbs. Per unit  
100 per pallet

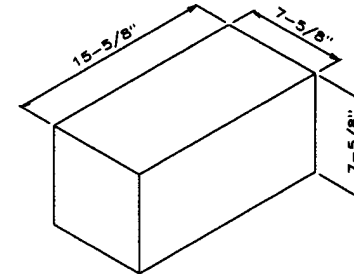

**8" Solid**  
• Soap / Slab / Termite

Percent Solid: 100 %


72 Lbs. Per unit  
30 per pallet

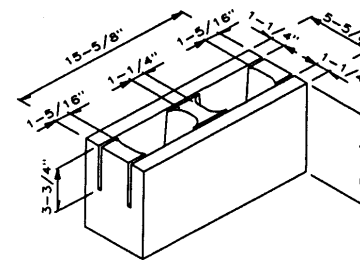

**6" Knock-Out Bond Beam**


Percent Solid: 46.83 %  
Equivalent Thickness: 4.51 Inches

34 Lbs. Per unit  
100 per pallet




### 8" Knock-Out Bond Beam

40.25 Lbs. Per unit  
90 per pallet

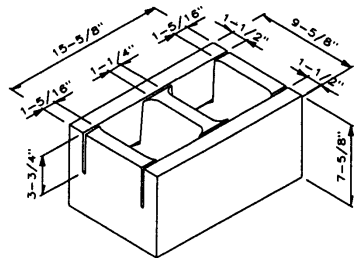


### 10" Knock-Out Bond Beam

44.5 Lbs. Per unit  
65 per pallet

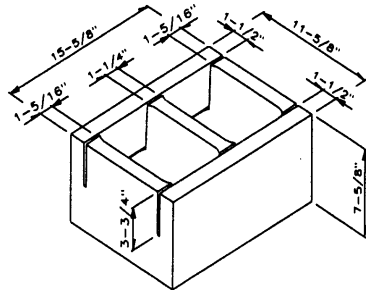


### 12" Knock-Out Bond Beam

51.75 Lbs. Per unit  
60 per pallet

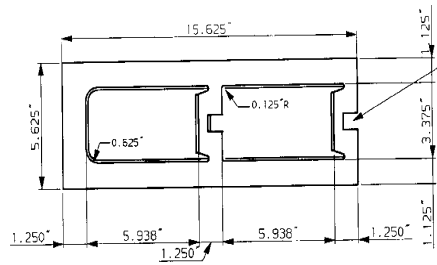


### 6" Utility Knock-Out • Vertical Conduit

34 Lbs. Per unit  
100 per pallet

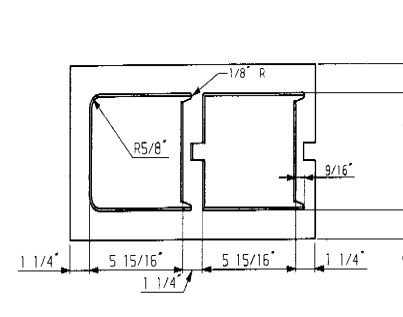


### 8" Utility Knock-Out • Vertical Conduit

40 Lbs. Per unit  
90 per pallet

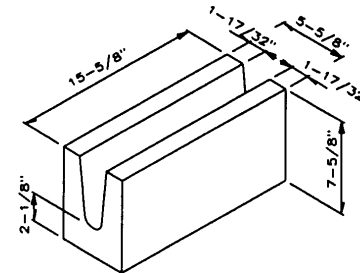


### 6" Solid Bottom Bond Beam • Lintel

40.5 Lbs. Per unit  
100 per pallet



### 8" Solid Bottom Bond Beam • Lintel

47 Lbs. Per unit  
90 per pallet



### 12" Solid Bottom Bond Beam • Lintel

68.75 Lbs. Per unit  
50 per pallet